


# SOLARMOUNT-E™ Roof Mount Technical Datasheet

Pub 120207-1td V4.0 March 2013

SOLARMOUNT-E Module Connection Hardware	
SOLARMOUNT-E Series Mid Clamp.....	1
SOLARMOUNT-E Series End Clamp.....	2
SOLARMOUNT-E Beam Connection Hardware	
SOLARMOUNT-E Flange Connection Foot and Clip .....	2
SOLARMOUNT-E Beam Splice .....	3
SOLARMOUNT-E Beam	
SOLARMOUNT-E Beam .....	3

## SOLARMOUNT-E Module Connection Hardware

### SOLARMOUNT-E Series Mid Clamp Part No. 002106M, 002106D

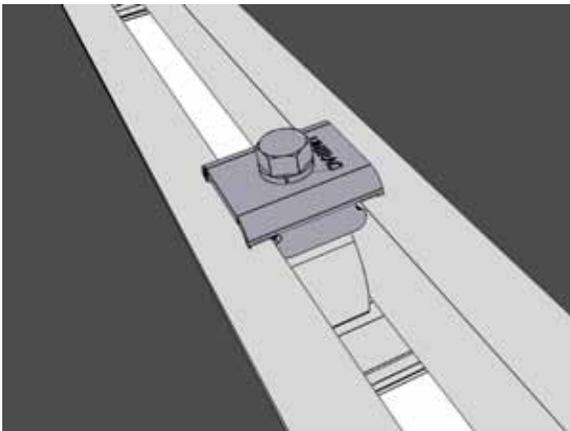

- **Mid Clamp Material:**  
*Bottom:* One of the following mill finished extruded aluminum alloys:  
 6005A-T61, 6351-T5, 6061-T6  
**Ultimate Tensile:** 38ksi  
*Top:* ASTM Stainless Steel 300 Series  
**Ultimate Tensile:** 70ksi
- **Mid Clamp Weight:** 0.209 lbs (95g)
- Allowable and design loads are valid when components are assembled with SOLARMOUNT-E Beams according to authorized UNIRAC documents
- Assemble with one 5/16 -18 stainless steel ASTM 300 Series bolt
- Tighten to 10 ft-lbs of torque
- Resistance factors and safety factors are determined according to part 1 section 9 of the 2005 Aluminum Design Manual, AC 428, and test results from an IAS accredited laboratory.




Dimensions specified in inches unless noted

Applied Load Direction	Average Ultimate lbs (N)	Allowable Load lbs (N)	Safety Factor, FS	Design Load lbs (N)	Resistance Factor, Φ
Parallel to Beam, X±	677 (3011)	244 (1085)	2.777	369 (1641)	0.545
Tension, Y+	2792 (12442)	1061 (4720)	2.635	1605 (7141)	0.574
Transverse to Beam, Z±	1655 (7360)	636 (289)	2.600	963 (4283)	0.582

## SOLARMOUNT-E Module Connection Hardware

### SOLARMOUNT-E End Clamp

Part No. 002011M

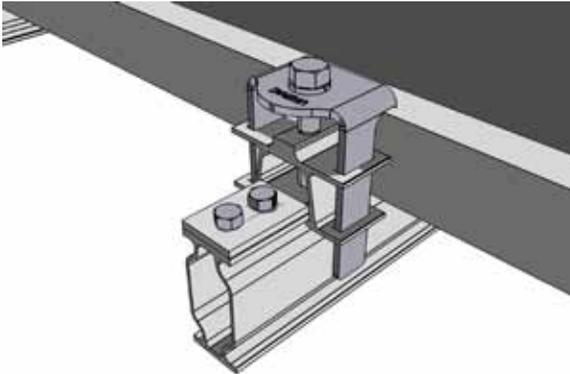

- **End Clamp Material:**  
*Bottom:* One of the following mill finished extruded aluminum alloys: 6005A-T61, 6351-T5, 6061-T6  
**Ultimate Tensile:** 38ksi  
*Top:* ASTM Stainless Steel 300 Series  
**Ultimate Tensile:** 70ksi
- **End Clamp Weight:** 0.323 lbs (147g)
- Allowable and design loads are valid when components are assembled with SOLARMOUNT-E Beams according to authorized UNIRAC documents
- Assemble with one <sup>5</sup>/<sub>16</sub>-18 ASTM stainless steel 300 Series bolt
- Tighten to 10 ft-lbs of torque
- Resistance factors and safety factors are determined according to part 1 section 9 of the 2005 Aluminum Design Manual, AC 428, and test results from an IAS accredited laboratory.
- Modules must be installed at least 1.5" from either end of a beam




Dimensions specified in inches unless noted

Applied Load Direction	Average Ultimate lbs (N)	Allowable Load lbs (N)	Safety Factor, FS	Design Loads lbs (N)	Resistance Factor, Φ
Parallel to Beam, X±	721 (3207)	204 (907)	3.539	308 (1369)	0.427
Tension, Y+	2590 (11521)	958 (4261)	2.702	1450 (6452)	0.560
Transverse to Beam, Z±	838 (3728)	315 (1401)	2.659	477 (2121)	0.569


## SOLARMOUNT-E Beam Connection Hardware

### SOLARMOUNT-E Flange Connection Foot and Clip

Part No. 04011M

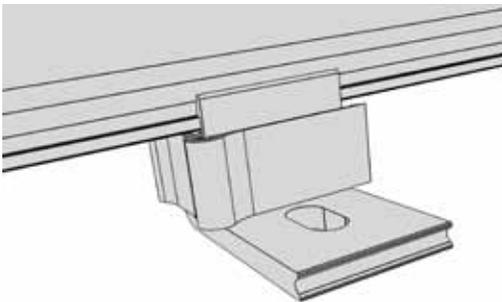

- **SOLARMOUNT-E Flange Connection Foot and Clip:** One of the following mill finished extruded aluminum alloys: 6005A-T61, 6351-T5, 6061-T6  
**Ultimate Tensile:** 38 ksi
- **Flange Connection Foot and Clip:** 0.117 lbs (53 g)
- Allowable and design loads are valid when components are assembled with SOLARMOUNT-E Beams according to authorized UNIRAC documents
- Flange Connection Feet are compatible with SOLARMOUNT-E Beams
- Resistance factors and safety factors are determined according to part 1 section 9 of the 2005 Aluminum Design Manual, AC 428, and test results from an IAS accredited laboratory.
- Design and allowable loads are for the beam to foot connection
- **Be sure to check load limits for roof attachments and standoffs**




Dimensions specified in inches unless noted

Applied Load Direction	Average Ultimate lbs (N)	Allowable Load lbs (N)	Safety Factor, FS	Design Load lbs (N)	Resistance Factor, Φ
Tension, Y+	1894 (8425)	744 (3309)	2.545	1125 (5004)	0.594
Compression, Y-	2987 (13287)	1183 (5262)	2.525	1789 (7959)	0.599
Transverse, X-, downhill	693 (3080)	243 (1081)	2.848	368 (1636)	0.531
Transverse, X+, uphill	450 (2002)	134 (596)	3.365	202 (899)	0.449
Sliding, Z±	(see SOLARMOUNT-E Beam Splice)				

## SOLARMOUNT-E Beam Connection Hardware

### SOLARMOUNT-E Beam Splice Part No. 00302M

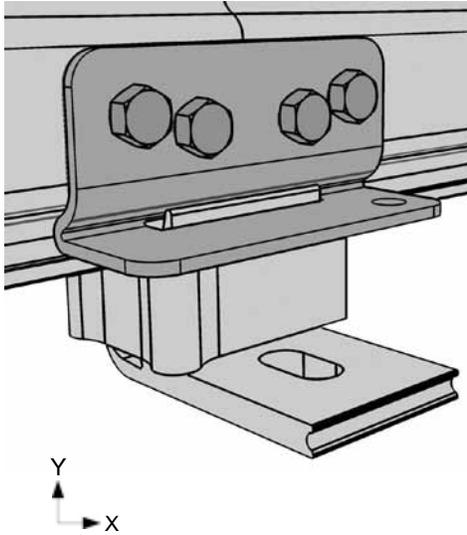


- **Beam Splice Material:** Aluminum 5052-H32  
**Ultimate Tensile:** 31 ksi, Yield: 23 ksi
- **Beam Splice Weight:** 0.105 lbs (48g)
- Allowable and design loads are valid when components are assembled according to authorized UNIRAC documents
- Beam Splices are compatible with SOLARMOUNT-E Beams when used with Flange Connector Foot
- Assemble with four (4) stainless steel self-tapping screws
- Resistance factors and safety factors are determined according to part 1 section 9 of the 2005 Aluminum Design Manual, AC 428, and test results from an IAS accredited laboratory.

Applied Load Direction	Average Ultimate lbs (N)	Allowable Load lbs (N)	Safety Factor, FS	Design Load lbs (N)	Resistance Factor, $\Phi$
Sliding, $\pm$	1146 (5098)	429 (1908)	2.672	649 (2885)	0.566

Dimensions specified in inches unless noted

## SOLARMOUNT-E Beam

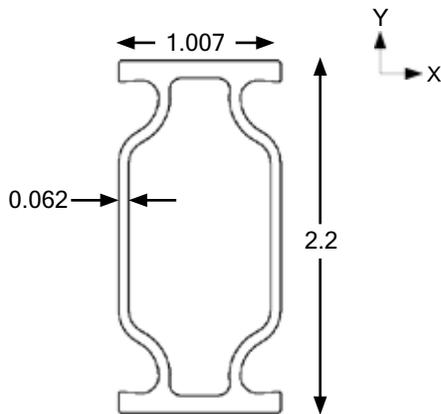

SOLARMOUNT-E Beam Height = 2.200"

Dimensions specified in inches unless noted

**MATERIAL: One of the following extruded aluminum alloys:  
6005A-T61, 6351-T5 or 6061-T6, Mill Finish**

Properties	Units	
Beam Height	in	2.200
Approximate Weight (per linear ft)	plf	0.644
Total Cross Sectional Area	in <sup>2</sup>	0.537
Section Modulus (X-Axis)	in <sup>3</sup>	0.3359
Section Modulus (Y-Axis)	in <sup>3</sup>	0.1309
Moment of Inertia (X-Axis)	in <sup>4</sup>	0.3695
Moment of Inertia (Y-Axis)	in <sup>4</sup>	0.0659
Radius of Gyration (X-Axis)	in	0.8295
Radius of Gyration (Y-Axis)	in	0.3504