

Rolls

FLOODED DEEP CYCLE BATTERIES

S-620



6 VOLTS

CONTAINER:	High Density Polypropylene
COVER:	High Density Polypropylene
TERMINALS:	Flag M
HANDLES:	Rope

WEIGHT DRY:	46 kg	101 Lbs.
WEIGHT WET:	59 kg	129 Lbs.
LENGTH:	318 mm	12 1/2 Inches
WIDTH:	181 mm	7 1/8 Inches
HEIGHT:	425 mm	16 3/4 Inches

PLATE HEIGHT:	293 mm	11.550 Inches
PLATE WIDTH:	143 mm	5.625 Inches
THICKNESS (POSITIVE):	4.32 mm	0.170 Inches
THICKNESS (NEGATIVE):	3.05 mm	0.120 Inches




CELLS:	19 Plates/Cell	3 Cell
SEPARATOR THICKNESS:	2 mm	0.062 Inches
GLASS MAT INSULATION:	1 mm	0.02 Inches
ELECTROLYTE RESERVE: ABOVE PLATES	57 mm	2.25 Inches

COLD CRANK AMPS (CCA):	0°F / -17.8°C	1480
MARINE CRANK AMPS (MCA):	32°F / 0°C	1850
RESERVE CAPACITY (RC @ 25A):		1048 Minutes

CAPACITY **482 AH**

HOURLY RATE:	SPECIFIC GRAVITY	CAPACITY / AMP HOUR	CURRENT / AMPS
@ 100 HOUR RATE	1.280	624	6.24
@ 72 HOUR RATE	1.280	590	8.20
@ 50 HOUR RATE	1.280	563	11.26
@ 24 HOUR RATE	1.280	496	20.69
@ 20 HOUR RATE	1.280	482	24.10
@ 15 HOUR RATE	1.280	452	30.14
@ 12 HOUR RATE	1.280	429	35.75
@ 10 HOUR RATE	1.280	410	40.97
@ 8 HOUR RATE	1.280	386	48.20
@ 6 HOUR RATE	1.280	357	59.45
@ 5 HOUR RATE	1.280	337	67.48
@ 4 HOUR RATE	1.280	313	78.33
@ 3 HOUR RATE	1.280	284	94.79
@ 2 HOUR RATE	1.280	246	122.91
@ 1 HOUR RATE	1.280	174	173.52

CYCLE LIFE VS. DEPTH OF DISCHARGE

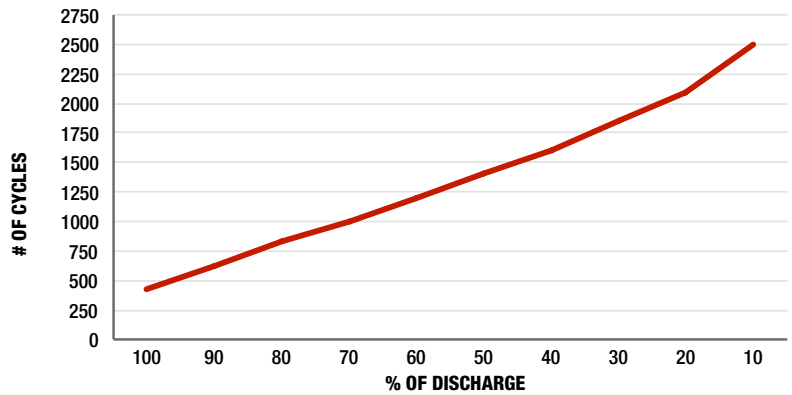

VOLTAGE VS. DEPTH OF DISCHARGE

