



Datasheet

Crystalline PV Module

NMC CHSM6612P Series

* NMC : Cell & Wafer not made in China

EN

295	300	305	310	315
-----	-----	-----	-----	-----

ELECTRICAL SPECIFICATIONS					
STC rated output (P _{mpp})*	295 Wp	300 Wp	305 Wp	310 Wp	315 Wp
PTC rated output (P _{mpp})**	265.7 Wp	270.3 Wp	275 Wp	279.6 Wp	284.2 Wp
Standard sorted output	0/+5 Wp				
Warranted power output STC (P _{nominal})	295 Wp	300 Wp	305 Wp	310 Wp	315 Wp
Rated voltage (V _{mpp}) at STC	35.72 V	35.74 V	35.77 V	35.80 V	35.83 V
Rated current (I _{mpp}) at STC	8.30 A	8.40 A	8.53 A	8.68 A	8.80 A
Open circuit voltage (V _{oc}) at STC	45.03 V	45.16 V	45.29 V	45.42 V	45.55 V
Short circuit current (I _{sc}) at STC	8.87 A	8.91 A	8.95 A	8.99 A	9.02 A
Module efficiency	15.2%	15.4%	15.7%	15.9%	16.2%
Rated output (P _{mpp}) at NOCT	206.0 Wp	209.5 Wp	213.0 Wp	216.5 Wp	220.0 Wp
Rated voltage (V _{mpp}) at NOCT	32.47 V	32.63 V	32.67 V	32.70 V	32.71 V
Rated current (I _{mpp}) at NOCT	6.34 A	6.42 A	6.52 A	6.62 A	6.73 A
Open circuit voltage (V _{oc}) at NOCT	41.32 V	41.44 V	41.56 V	41.68 V	41.80 V
Short circuit current (I _{sc}) at NOCT	6.86 A	6.89 A	6.92 A	6.95 A	6.98 A
Temperature coefficient (P _{mpp})	- 0.45%/K		Maximum system voltage UL	1000 Vdc	
Temperature coefficient (I _{sc})	+0.087%/K		Number of diodes	6 (or 3)	
Temperature coefficient (I _{mpp})	+0.007%/K		Maximum series fuse rating	15 A	
Temperature coefficient (V _{mpp})	- 0.445%/K				
Temperature coefficient (V _{oc})	- 0.332%/K				
Normal operating cell temperature (NOCT)	46±2°C				

* Measurement tolerance +/- 3%
 ** Estimated



RELATED PARAMETERS

Cell type	polycrystalline
Number of cells / cell arrangement	72 / 6 x 12
Cells dimension	6"
Packing unit	20 modules
Weight of packing unit	528 kg / 1162 lbs


MECHANICAL SPECIFICATIONS

Outer dimensions (L x W x H)	1956 x 994 x 50 mm 77.01 x 39.13 x 1.97 in
Frame technology	Aluminum, silver anodized
Module composition	Glass / EVA / Backsheet (white)
Weight (module only)	23.5 kg / 51.7 lbs
Front glass thickness	3.2 mm / 0.13 in
Junction box IP rating	IP 65 (above)
*Cable length (UL)	1150 mm / 45.28 in
Cable diameter (UL)	12 AWG
Maximum load capacity	5400 Pa
Fire class	C
Connector type (UL)	MC type 4 compatible

* Option: 1000 mm for defined projects in advance.

QUALIFICATION AND LINEAR WARRANTIES


Product standard	UL 1703
Extended product warranty	10 years
Output decline 3%/year performance P_{mpp} (STC)	1 st year
Output decline 0.7%/year performance P_{mpp} (STC)	2 nd - 25 th years

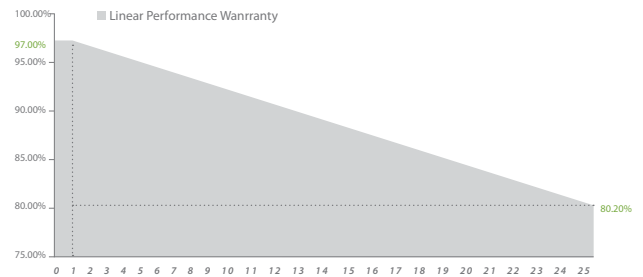

ARTICLE NUMBER (per panel) - (NMC) CHSM6612P Series

Model	Article No. (UL)
(NMC) CHSM6612P-295	200156
(NMC) CHSM6612P-300	200157
(NMC) CHSM6612P-305	200275
(NMC) CHSM6612P-310	200276
(NMC) CHSM6612P-315	200367

MODULE DIMENSION DETAILS

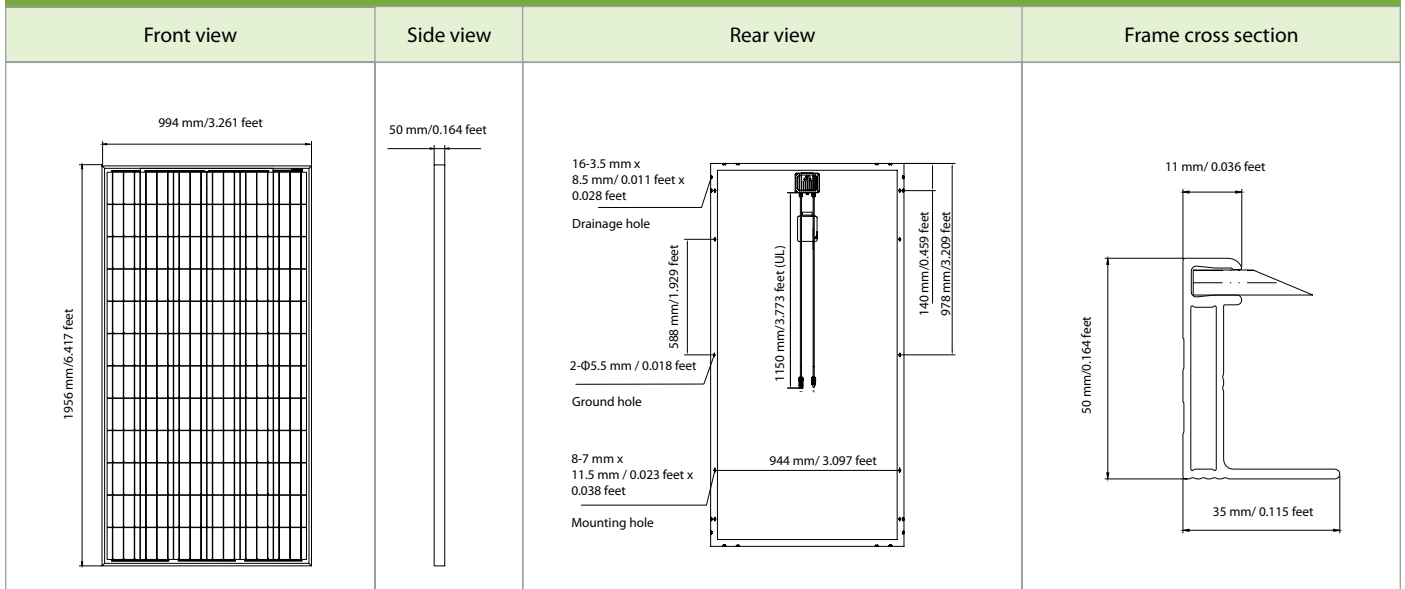

© Chint Solar (Zhejiang) Co., Ltd. All rights reserved.
Specifications and designs included in this datasheet are subject to change without notice.