



SHIFTING THE LIMITS

# FRONIUS GALVO

/ The future-proof inverter for small self-consumption systems.



/ SnapInverter Technology



/ HF transformer switchover



/ Integrated data communication



/ Smart Grid Ready



/ Zero feed-in



/ With power categories ranging from 1.5 to 3.1 kW, the Fronius Galvo is perfect for households – and is especially suitable for self-consumption systems. The integrated energy management relay allows the self-consumption component to be maximised. A host of other smart features make the Fronius Galvo one of the most future-proof inverters in its class: for example, the integrated datalogging, the simple connection to the internet by WLAN, or the plug-in card technology for retrofitting additional functions.


## TECHNICAL DATA FRONIUS GALVO

INPUT DATA	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1 <sup>1)</sup>	GALVO 3.1-1
Max. input current ( $I_{dc\ max}$ )	13.3 A	17.8 A	16.6 A	19.8 A	20.7 A
Max. array short circuit current	20.0 A	26.8 A	24.8 A	29.6 A	31.0 A
Min. input voltage ( $U_{dc\ min}$ )		120 V		165 V	
Feed-in start voltage ( $U_{dc\ start}$ )		140 V		185 V	
Nominal input voltage ( $U_{dc,r}$ )		260 V		330 V	
Max. input voltage ( $U_{dc\ max}$ )		420 V		550 V	
MPP voltage range ( $U_{mpp\ min} - U_{mpp\ max}$ )		120 - 335 V		165 - 440 V	
Number of MPP trackers			1		
Number of DC connections			3		
Max. PV generator output ( $P_{dc\ max}$ )	3.0 kWpeak	4.0 kWpeak	5.0 kWpeak	6.0 kWpeak	6.2 kWpeak
OUTPUT DATA	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1 <sup>1)</sup>	GALVO 3.1-1
AC nominal output ( $P_{ac,r}$ )	1,500 W	2,000 W	2,500 W	3,000 W	3,100 W
Max. output power	1,500 VA	2,000 VA	2,500 VA	3,000 VA	3,100 VA
AC output current ( $I_{ac\ nom}$ )	6.5 A	8.7 A	10.9 A	13.0 A	13.5 A
Grid connection (voltage range)			1-NPE 230 V (+17 % / -20 %)		
Frequency (frequency range)			50 Hz / 60 Hz (45 - 65 Hz)		
Total harmonic distortion			< 4 %		
Power factor ( $\cos\ \varphi_{ac,r}$ )			0.85 - 1 ind. / cap.		
GENERAL DATA	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1 <sup>1)</sup>	GALVO 3.1-1
Dimensions (height x width x depth)			645 x 431 x 204 mm		
Weight		16.4 kg		16.8 kg	
Degree of protection			IP 65		
Protection class			1		
Overvoltage category (DC / AC) <sup>2)</sup>			2 / 3		
Night-time consumption			< 1 W		
Inverter concept			HF transformer		
Cooling			Regulated air cooling		
Installation			Indoor and outdoor installation		
Ambient temperature range			-25 - +50 °C		
Permitted humidity			0 to 100 %		
Max. altitude		2,000 m / 3,500 m (unrestricted / restricted voltage range)			
DC connection technology		3x DC+ and 3x DC- screw terminals 2.5 - 16 mm <sup>2</sup>			
AC connection technology		3-pin AC screw terminals 2.5 - 16 mm <sup>2</sup>			
Certificates and compliance with standards	ÖVE / ÖNORM E 8001-4-712, AS 4777-2, AS 4777-3, AS3100, DIN V VDE 0126-1-1/A1, VDE AR N 4105, IEC 62109-1-2, IEC 62116, IEC 61727, CER 06-190, CEI 0-21, EN 50438, G83, G59, NRS 097				


<sup>1)</sup> Available for countries where 3 kW restrictions apply. <sup>2)</sup> Testing to IEC 62109-1.

Further information regarding the availability of the inverters in your country can be found at [www.fronius.com](http://www.fronius.com).

## FRONIUS GALVO 3.1-1 EFFICIENCY CURVE

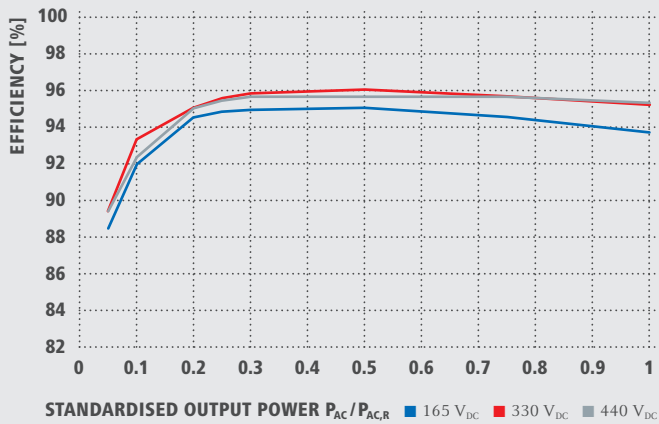

## FRONIUS GALVO 3.1-1 TEMPERATURE DERATING

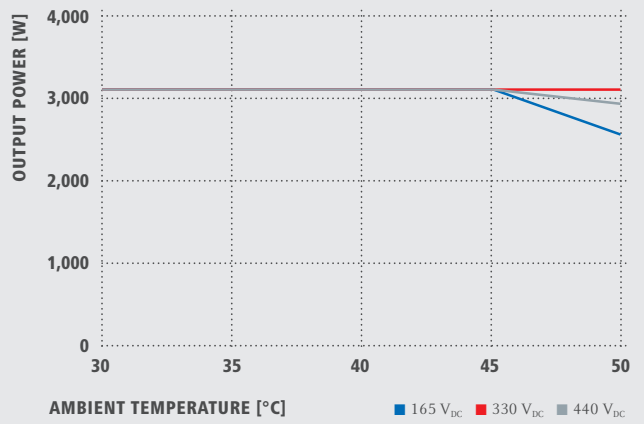

## TECHNICAL DATA FRONIUS GALVO

EFFICIENCY	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1 <sup>1)</sup>	GALVO 3.1-1
Max. efficiency	95.9 %	96.0 %		96.1 %	
European efficiency ( $\eta_{EU}$ )	94.5 %	94.9 %	95.2 %	95.4 %	95.4 %
$\eta$ at 5 % $P_{AC,r}$ <sup>2)</sup>	84.5 / 86.0 / 86.0 %	84.2 / 86.1 / 85.9 %	88.6 / 89.6 / 89.4 %	88.2 / 89.2 / 89.1 %	88.4 / 89.4 / 89.4 %
$\eta$ at 10 % $P_{AC,r}$ <sup>2)</sup>	87.5 / 89.7 / 89.6 %	89.6 / 91.4 / 91.3 %	91.2 / 92.3 / 91.4 %	91.8 / 93.1 / 92.1 %	91.9 / 93.3 / 92.3 %
$\eta$ at 20 % $P_{AC,r}$ <sup>2)</sup>	91.3 / 93.3 / 93.1 %	92.6 / 94.3 / 93.9 %	94.0 / 94.8 / 94.5 %	94.4 / 95.0 / 94.9 %	94.5 / 95.0 / 95.0 %
$\eta$ at 25 % $P_{AC,r}$ <sup>2)</sup>	92.4 / 94.1 / 93.9 %	93.3 / 94.9 / 94.5 %	94.5 / 95.1 / 95.0 %	94.8 / 95.5 / 95.3 %	94.8 / 95.5 / 95.4 %
$\eta$ at 30 % $P_{AC,r}$ <sup>2)</sup>	93.0 / 94.6 / 94.3 %	93.6 / 95.2 / 94.9 %	94.8 / 95.5 / 95.3 %	94.8 / 95.7 / 95.6 %	94.9 / 95.8 / 95.6 %
$\eta$ at 50 % $P_{AC,r}$ <sup>2)</sup>	93.9 / 95.5 / 95.2 %	94.3 / 95.8 / 95.2 %	95.0 / 95.7 / 95.2 %	95.0 / 96.0 / 95.5 %	95.0 / 96.1 / 95.6 %
$\eta$ at 75 % $P_{AC,r}$ <sup>2)</sup>	94.2 / 95.6 / 95.4 %	94.0 / 95.9 / 95.6 %	94.8 / 95.9 / 95.6 %	94.6 / 95.8 / 95.6 %	94.5 / 95.6 / 95.6 %
$\eta$ at 100 % $P_{AC,r}$ <sup>2)</sup>	94.0 / 95.9 / 95.6 %	93.5 / 95.6 / 95.5 %	94.4 / 95.7 / 95.5 %	93.9 / 95.4 / 95.3 %	93.7 / 95.2 / 95.3 %
MPP adaptation efficiency			> 99.9 %		

PROTECTION DEVICES	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1 <sup>1)</sup>	GALVO 3.1-1
DC insulation measurement		Warning/shutdown (depending on country setup) at $R_{ISO} < 600 \text{ k}\Omega$			
Overload behavior		Operating point shift, power limitation			
DC disconnecter		Included			
Reverse polarity protection		Yes			

INTERFACES	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1 <sup>1)</sup>	GALVO 3.1-1
WLAN / Ethernet LAN		Fronius Solar.web, Modbus TCP SunSpec, Fronius Solar API (JSON)			
6 inputs and 4 digital inputs/outputs		Interface to ripple control receiver			
USB (A socket) <sup>3)</sup>		Datalogging, inverter update via USB flash drive			
2x RS422 (RJ45 socket) <sup>3)</sup>		Fronius Solar Net			
Signalling output <sup>3)</sup>		Energy management (floating relay output)			
Datalogger and Webserver		Included			
External input <sup>3)</sup>		50-Meter Interface / Input for overvoltage protection			
RS485		Modbus RTU SunSpec or meter connection			

<sup>1)</sup> Available for countries where 3 kW restrictions apply. <sup>2)</sup> And at  $U_{mpp \text{ min}} / U_{dc,r} / U_{mpp \text{ max}}$ . <sup>3)</sup> Also available in the light version. Further information regarding the availability of the inverters in your country can be found at [www.fronius.com](http://www.fronius.com).

/ Perfect Welding / Solar Energy / Perfect Charging

### WE HAVE THREE DIVISIONS AND ONE PASSION: SHIFTING THE LIMITS OF POSSIBILITY.

/ Whether welding technology, photovoltaics or battery charging technology – our goal is clearly defined: to be the innovation leader. With around 3,700 employees worldwide, we shift the limits of what's possible - our record of over 800 granted patents is testimony to this. While others progress step by step, we innovate in leaps and bounds. Just as we've always done. The responsible use of our resources forms the basis of our corporate policy.

Further information about all Fronius products and our global sales partners and representatives can be found at [www.fronius.com](http://www.fronius.com)

v06 Apr 2016 EN

Fronius India Private Limited  
GAT no 312, Nanekarwadi  
Chakan, Taluka - Khed District  
Pune 410501  
India  
pv-sales-india@fronius.com  
www.fronius.in

Fronius Australia Pty Ltd.  
90-92 Lambeck Drive  
Tullamarine VIC 3043  
Australia  
pv-sales-australia@fronius.com  
www.fronius.com.au

Fronius UK Limited  
Maidstone Road, Kingston  
Milton Keynes, MK10 0BD  
United Kingdom  
pv-sales-uk@fronius.com  
www.fronius.co.uk

Fronius International GmbH  
Froniusplatz 1  
4600 Wels  
Austria  
pv-sales@fronius.com  
www.fronius.com