


## Innovation for a Better Life



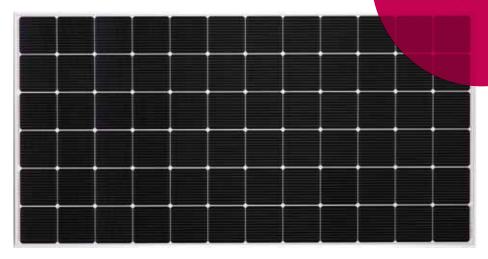

LG375N2W-G4

# 72 cell

LG New module, NeON™ 2 72cell adopts Cello technology. Cello technology replaces 3 busbars with 12 thin wires to enhance power output and reliability. NeON™ 2 72cell demonstrates LG's efforts to increase customer's values beyond efficiency. It features enhanced warranty, durability and performance in a real environment.











## **Enhanced Performance Warranty**

LG NeON™ 2 72cell has an enhanced performance warranty. The annual degradation has fallen from 0.7%/yr to 0.6%/yr. Even after 25 years, module guarantees 2.4%p more output than the previous LG NeON™ modules.



## **Improved Product Warranty**

As well as the enhanced performance warranty, LG has extended the product warranty of the LG NeON™ 2 72cell for an additional 2 years.



## Better Performance on a Sunny Day

LG NeON™ 2 72cell now performs better on a sunny days thanks to its improved temperature coefficiency.



## **High Power Output**

Compared with previous models, the LG NeON™ 2 72cell has been designed to significantly enhance its output efficiency, hereby making space management more efficient even in limited areas.



## **Double-Sided Cell Structure**

The rear of the cell used in LG NeON™ 2 72cell will contribute to generation, just like the front; the light beam reflected from the rear of the module is reabsorbed to generate a great amount of additional power.



## **BOS (Balance Of System) Saving**

LG NeON™ 2 72cell can reduce the total number of strings due to its high module efficiency resulting in a more cost effective and efficient solar power system.

#### **About LG Electronics**

## **Mechanical Properties**

Cells	6 x 12
Cell Vendor	LG
Cell Type	Monocrystalline / N-type
Cell Dimensions	156.75 x 156.75 mm / 6 inches
# of Busbar	12 (Multi Wire Busbar)
Dimensions (L x W x H)	1960 x 1000 x 46 mm
Front Load	5400 Pa
Rear Load	2400 Pa
Weight	$20.3 \pm 0.5 \text{ kg}$
Connector Type	MC4
Junction Box	IP67 with 3 Bypass Diodes
Length of Cables	1200 mm x 2 ea
Glass	High Transmission Tempered Glass
Frame	Anodized Aluminum


## **Certifications and Warranty**


Certifications	IEC 61215, IEC 61730-1/-2
	UL1703
	IEC 61701 (Salt corrosion test)*
	IEC 62716 (Ammonia corrosion test)*
	ISO 9001
Module Fire Performance	Type 2 (UL1703)
Fire Rating (for CANADA)	Class C (ULC/ORD C1703)
Product Warranty	12 years
Output Warranty of Pmax	Linear warranty**

## **Temperature Characteristics**

NOCT	45 ± 3 ℃
Pmpp	-0.38 %/°C
Voc	-0.28 %/°C
Isc	0.03 %/℃

## **Characteristic Curves**

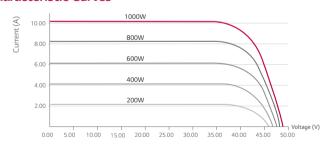

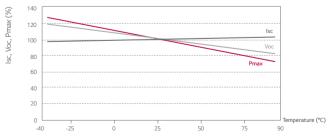

## **Electrical Properties (STC \*)**


Module Type	375W
MPP Voltage (Vmpp)	39.6
MPP Current (Impp)	9.50
Open Circuit Voltage (Voc)	48.3
Short Circuit Current (Isc)	10.04
Module Efficiency (%)	19.1
Operating Temperature (°C)	-40 ~ +90
Maximum System Voltage (V)	1000
Maximum Series Fuse Rating (A)	20
Power Tolerance (%)	0 ~ +3


## **Electrical Properties (NOCT\*)**

Module Type	375 W
Maximum Power (Pmax)	277
MPP Voltage (Vmpp)	36.6
MPP Current (Impp)	7.57
Open Circuit Voltage (Voc)	45.0
Short Circuit Current (Isc)	8.08

<sup>\*</sup> NOCT (Nominal Operating Cell Temperature): Irradiance 800 W/m², ambient temperature 20 °C, wind speed 1 m/s

## Dimensions (mm/in)

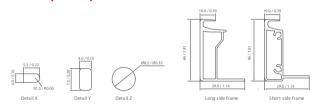

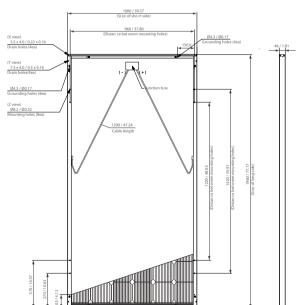

\* The distance between the center of the mounting/grounding holes.



North America Solar Business Team LG Electronics U.S.A. Inc 1000 Sylvan Ave, Englewood Cliffs, NJ 07632

Contact: lg.solar@lge.com www.lgsolarusa.com

Product specifications are subject to change without notice.

Copyright © 2016 LG Electronics. All rights reserved. 01/01/2016



<sup>\*\*1) 1</sup>st year: 98%, 2) After 2nd year: 0.6%p annual degradation, 3) 83.6% for 25 years

<sup>\*</sup> STC (Standard Test Condition): Irradiance 1000 W/m², Module Temperature 25 °C, AM 1.5 \*The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.